

## Backside of Kite






Figure A

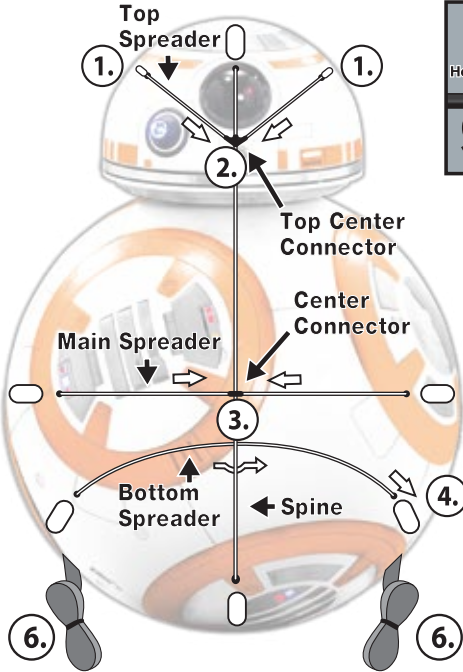

## Front of Kite



1. Insert hook end of the Top Spreader into hole (Left and Right). See Figure A (This step may already be complete).
2. Insert Top Spreader lines into Top Center Connector (Left and Right).
3. Insert Main Spreader lines into Center Connector (Left and Right).
4. Pass Bottom Spreader under Spine, pass through hole and insert into Edge Connector on the front of kite.
5. Attach QuikClip® to the Bridle Loop on the front of Kite.
6. Unwind SkyTails®.

7. In stronger winds, tie SkyTails® together for more stability.

## LAUNCHING - ASSISTED LAUNCH

- The kite requires a minimum wind of 5 mph / 8 kph. Let out approximately 50 feet / 15.24 m of line and have an assistant hold the kite.
- With your back to the wind, release the kite and take a few steps backwards, the kite will rise into the air. Tug line to gain altitude, let out line to gain distance.
- For storage, reverse assembly steps and place into package. Store your kite in a cool dry place. Excessive heat and/or sunlight can damage the package and kite.

## KITE SAFETY

WARNING! Do not fly near overhead power lines.  
 WARNING! Do not use near overhead power lines or during thunderstorms.  
 WARNING! Not suitable for children under 3 years due to small parts.  
 WARNING! Not suitable for children under 3 years due to long cord.  
 Please remove all packaging material before giving the toy to child.  
 Keep important information for future reference.

Never fly near an airport.  
 Never fly over people.  
 Never fly in thunderstorms.  
 Never fly near busy streets.

Never fly near overhead power lines.  
 Never try to retrieve your kite from power lines.  
 Call your local power company for assistance.